

PRODUCT DESCRIPTION

- Solidne mocowanie i podświetlanie przezroczystego panelu ze szkła lub tworzyw sztucznych

FINISH :

Silver anodized

*Custom colors available upon request



Fill empty fields

Product nr.	
Fixture type	
Company	
Job name	
Date	

TECHNICAL SPECIFICATION

Application

- for making appealing, backlit decorations on the edge of signs and boards

Assembly

- panel held in the fixture by means of a series of expansion bolts hidden in the profile interior - on the surface of walls and ceilings it is mounted on the heads of bolts


Additional information

- panel thickness approx. 6 mm (0.25")
- with the profile attached horizontally, the panel cannot stand from the ceiling more than 51 cm
- when the profile is mounted vertically, the panel cannot protrude more than 51 cm from the wall. Its vertical dimension may not be less than 60% of the horizontal dimension
- the length of the panel cannot exceed the length of the profile

AVAILABLE LENGTHS


Ref. nr.	surface finish	available lengths
18043ANODA_1	Silver anodized	1000 mm
18043ANODA_2	Silver anodized	2000 mm
18043ANODA_3	Silver anodized	3000 mm

TECHNICAL DRAWING

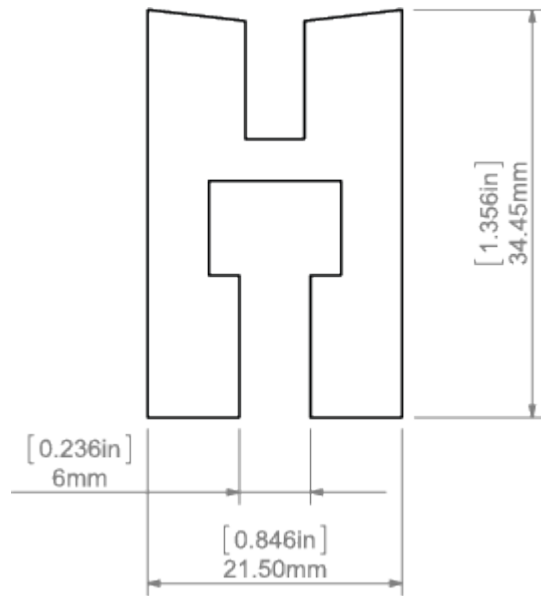


RELATED PRODUCTS


END CAPS



EX End cap
Ref: 0963



EX-3D End cap
Ref: 0962



EX-3D-OTW End
cap
Ref: 1452

ACCESSORIES



8,8x1,2 Gland
Ref: 00802

MARKETING MATERIALS



Presentation set 1
Ref: 90051